

**Conference System Main Unit HT-7000C**

- ◆ Designed accordance to ISO and IEC914 standards.
- ◆ Main unit can support 70 units delegate and chairman microphone, it could be extend to support 500 units microphone with extension power unit
- ◆ Equipped with three groups of 8P-DIN interface for system connection



**Conference System Main Unit HT-3000**

- ◆ Designed accordance to ISO and IEC914 standards.
- ◆ Main unit can support 60 units delegate and chairman microphone, it could be extend to support 200 units microphone with extension power unit
- ◆ Equipped with four groups of 8P-DIN interface for system connection
- ◆ Built-in monitor loudspeaker
- ◆ System support 1/2/3/5/Free mode
- ◆ Support video camera auto-track with video processor HT-8008
- ◆ Connection:
  - 1 pcs 13m main cable with 8PIN plugs;
  - 8 PIN socket for system connection.



**Technical Parameter of HB Series Conference System**

**Technical Parameter of Main Unit HT-7000C**



Items	Parameter
Power supply	AC110V/240V, 50Hz~60Hz
Consumption rating	50W
Color	Black
N.W	3.3kg
Audio output	RCA×2, XLR×1, Ø6.3×1
System connection	8-PIN DIN×3
Dimension (mm)	480x240x45 (19"/1U)

## Technical Parameter of HB Series Conference System

### Technical Parameter of Main Unit HT-3000

Items	Parameter
Power supply	AC110V/240V, 50Hz~60Hz
Consumption rating	500W
T.H.D.	<0.05%
S/N	>75db
Frequency response	100Hz—18kHz
Color	Black
N.W	9.3kg
Audio output	RCA×4, 6.33mm×1
Audio input	Φ6.3×2
System connection	8-PIN DIN×4
Dimension (mm)	480×360×85 (19"/2U)

## Conference System Microphone Unit


Microphone Picture & Model Number	Function & Technical Parameter
 <p>HB-250c Chairman Unit      HB-250d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -40 dB±2dB</li> <li>▶ Dimension: 153x135x58 mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.5 kg</li> <li>▶ Support discuss</li> <li>▶ Chairman with priority button</li> <li>▶ Microphone equipped with 1.5M 8P cable</li> </ul>
 <p>HB-350c Chairman Unit      HB-350d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -42dB±2dB</li> <li>▶ Dimension: 168×145×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Support discuss &amp; video</li> <li>▶ Chairman with priority button</li> <li>▶ Built-in inner speaker</li> </ul>

### Equipment and Function List

Main Unit	HT-7000C Main Unit			HT-3000 Main Unit		
	Discuss	Video	Vote	Discuss	Video	Vote
HB-250c/d	V					
HB-350c/d				V	*	

- ▶ V = Achieve the function without other equipments
- ▶ \* = Add HT-8008 video processor to achieve video camera auto-track function

**HT-7000C System Connection Diagram**

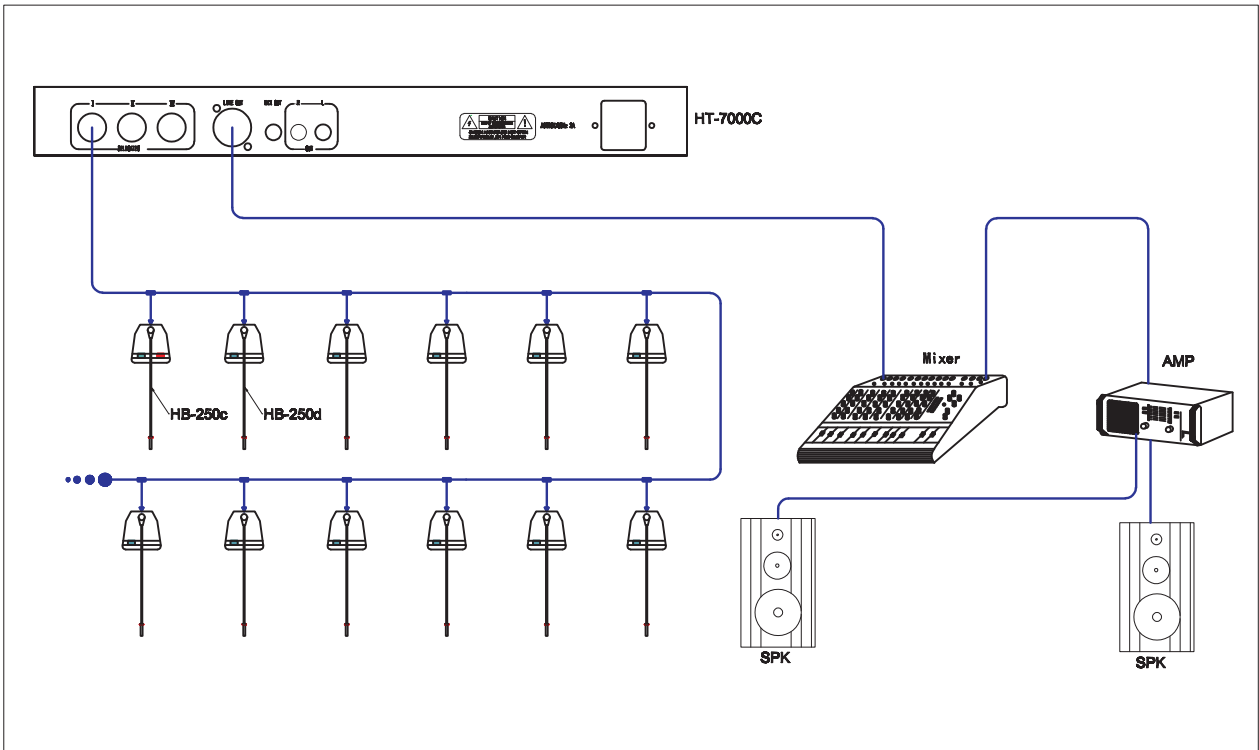

HT-3000 System Connection Diagram

